


ARIES 150 MRL

Dumb-Waiter Lifts

Dumb-waiter lifts are often used in restaurants, hotels, hospitals and sometimes in villas for vertical transportation of small materials.

Dumb-waiter lifts can be produced as hydraulic or mechanic systems in order to meet the expectation and need of different capacities, speeds and travels.

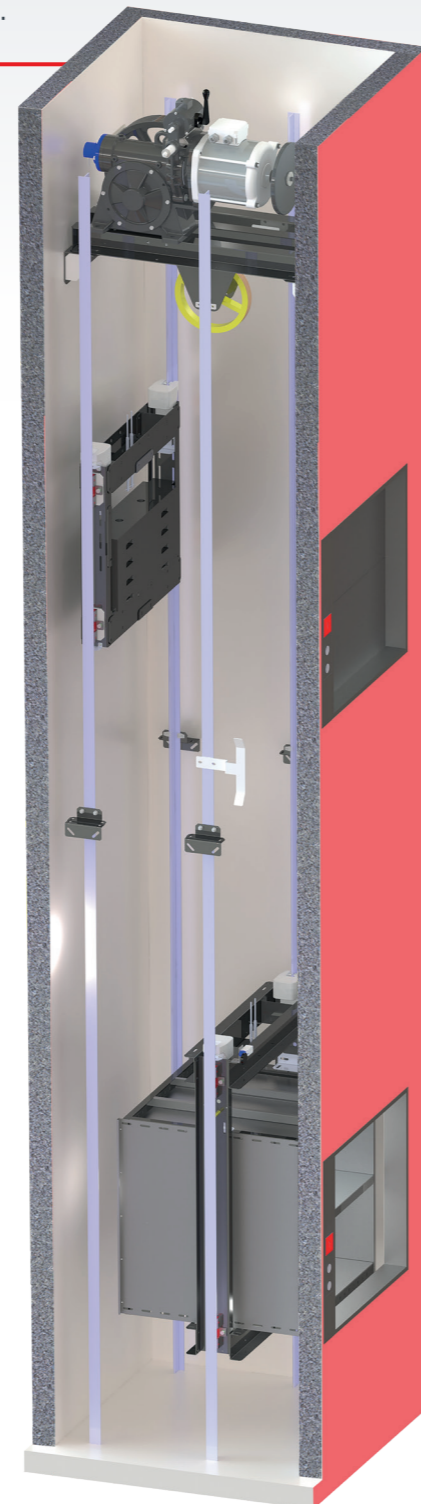

Minimum Headroom	: 3000mm
Minimum Pit Depth	: 800mm
Rated Speed	: max. 0,46 m/s

Rated Load	KG	100 - 300
Machine Room		Machine Roomless
Class 5: Service Lift		
Car Internal Height		800-900
Car Types		Service Elevators
Door Type		Guillotine or Single Side
Car Entrances		1 Entrance or 2 Entrances at 180°
Door Clear Opening	mm	600..1000
Door Clear Height	mm	600..1000
Max. Stops		6
Max. Travel	m	15
Applicable Standards		EN81-41, 2006/42/EC, ISO 9386-1

